


Top view

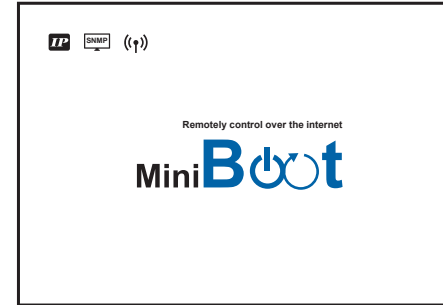

16A model :	Circuit Protection
MiniBoot-4FR-16A	16A resettable fuse x 1

Input Rating : 16Amp, 230V
Outlet : French #1-4
Inlet : 16A IEC320 C20
Protection : 16A resettable fuse x 1
Circuit : Output 16A max.

10A model :	Circuit Protection
MiniBoot-4FR-10A	10A resettable fuse x 1

Input Rating : 10Amp, 230V
Outlet : French #1-4
Inlet : 16A IEC320 C20
Protection : 10A resettable fuse x 1
Circuit : Output 10A max.



Meter Features (MiniBoot PDU)

Local Display	: 3-digit LED ammeter for input current
Measurement	: Current (Amp)
Alarm threshold support	: Overload, temp, humidity & auto-ping
Remote management	: Telnet or SNMP v2 / v3
Outlet	: ON / OFF / Reboot over network
IP security	: LDAPv3 / LDAPS, AD, RADIUS, local credential database
Protocol	: HTTP(S), SSH Command Line Interface, Telnet, SMTP, IPv6/IPv4
1 x IP port	: 10 / 100 / 1000 Base T, RJ45
1 x serial port	: for CLI command access
2 x sensor port	: Support Temp. / Temp. + Humid. / Smoke sensor / Door switch
1 x USB port	: for Wifi Kit (option)

Chassis Material : Steel
Chassis Color : White

Net weight : - kg
Gross weight : - kg

Product Dimension : 220 (W) x 150 (D) x 55 (H) mm
Packing dimension : --- (W) x --- (D) x --- (H) mm

EMC Compliance : CE / EMC
Safety Compliance : CE / LVD
Environment Compliance : RoHS3, Reach & WEEE

Operating Temperature : -5 to 60 °C
Storage Temperature : -25 to 65 °C
Operating Altitude : 0 to 2,000 m
Storage Altitude : 0 to 15,000 m
Humidity : 8 to 95% RH, non-condensing