


Top view

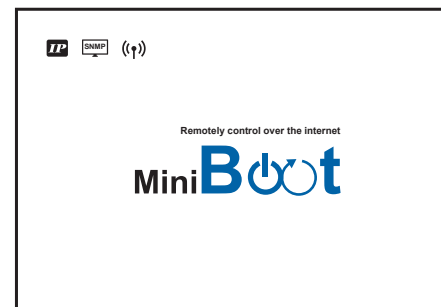

16A model :	Circuit Protection
MiniBoot-4SCH-16A	16A resettable fuse x 1

Input Rating : 16Amp, 230V  
 Outlet : Schuko #1-4  
 Inlet : 16A IEC320 C20  
 Protection : 16A resettable fuse x 1  
 Circuit : Output 16A max.

10A model :	Circuit Protection
MiniBoot-4SCH-10A	10A resettable fuse x 1

Input Rating : 10Amp, 230V  
 Outlet : Schuko #1-4  
 Inlet : 16A IEC320 C20  
 Protection : 10A resettable fuse x 1  
 Circuit : Output 10A max.



**Meter Features ( MiniBoot PDU )**

- Local Display : 3-digit LED ammeter for input current
- Measurement : Current ( Amp )
- Alarm threshold support : Overload, temp, humidity & auto-ping
- Remote management : Telnet or SNMP v2 / v3
- Outlet : ON / OFF / Reboot over network
- IP security : LDAPv3 / LDAPS, AD, RADIUS, local credential database
- Protocol : HTTP(S), SSH Command Line Interface, Telnet, SMTP, IPv6/IPv4
- 1 x IP port : 10 / 100 / 1000 Base T, RJ45
- 1 x serial port : for CLI command access
- 2 x sensor port : Support Temp. / Temp. + Humid. / Smoke sensor / Door switch
- 1 x USB port : for Wifi Kit ( option )

- Chassis Material : Steel
- Chassis Color : White
- Net weight : - kg
- Gross wieht : - kg
- Product Dimension : 220 (W) x 150 (D) x 55 (H) mm
- Packing dimension : --- (W) x --- (D) x --- (H) mm

- EMC Compliance : CE / EMC
- Safety Compliance : CE / LVD
- Environment Compliance : RoHS3, Reach & WEEE
- Operating Temperature : -5 to 60 °C
- Storage Temperature : -25 to 65 °C
- Operating Altitude : 0 to 2,000 m
- Storage Altitude : 0 to 15,000 m
- Humidity : 8 to 95% RH, non-condensing